




FÄRNA

The fancoil you
didn't expect

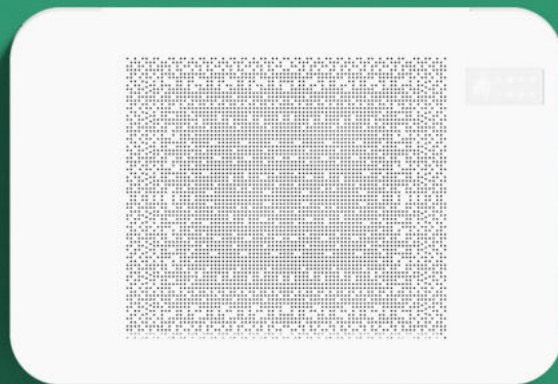

FÄRNA

3	INTRO
7	VERSATILE
8	SIZE
10	POWER
14	DESIGN
17	COMMANDS
24	FÄRNA SMALL E BIG
32	BUTLER PRO





FÄRNA

FÄRNA, why?

INNOVA has a very wide range of different products and solutions to cover every requirement in the world of fancoils. However, something unexplored was still there. Undiscovered, unreached ... market needs perhaps not yet expressed, certainly not met.

In many cases, installation needs demand POWER when SPACE is not enough.


Hence the new, seductive idea of INNOVA: combine BIG power in a SMALL space.

That's why FÄRNA was born: two special, distinctive models to meet installation needs unanswered to date.

FÄRNA: a great new idea from INNOVA, discover it with us!






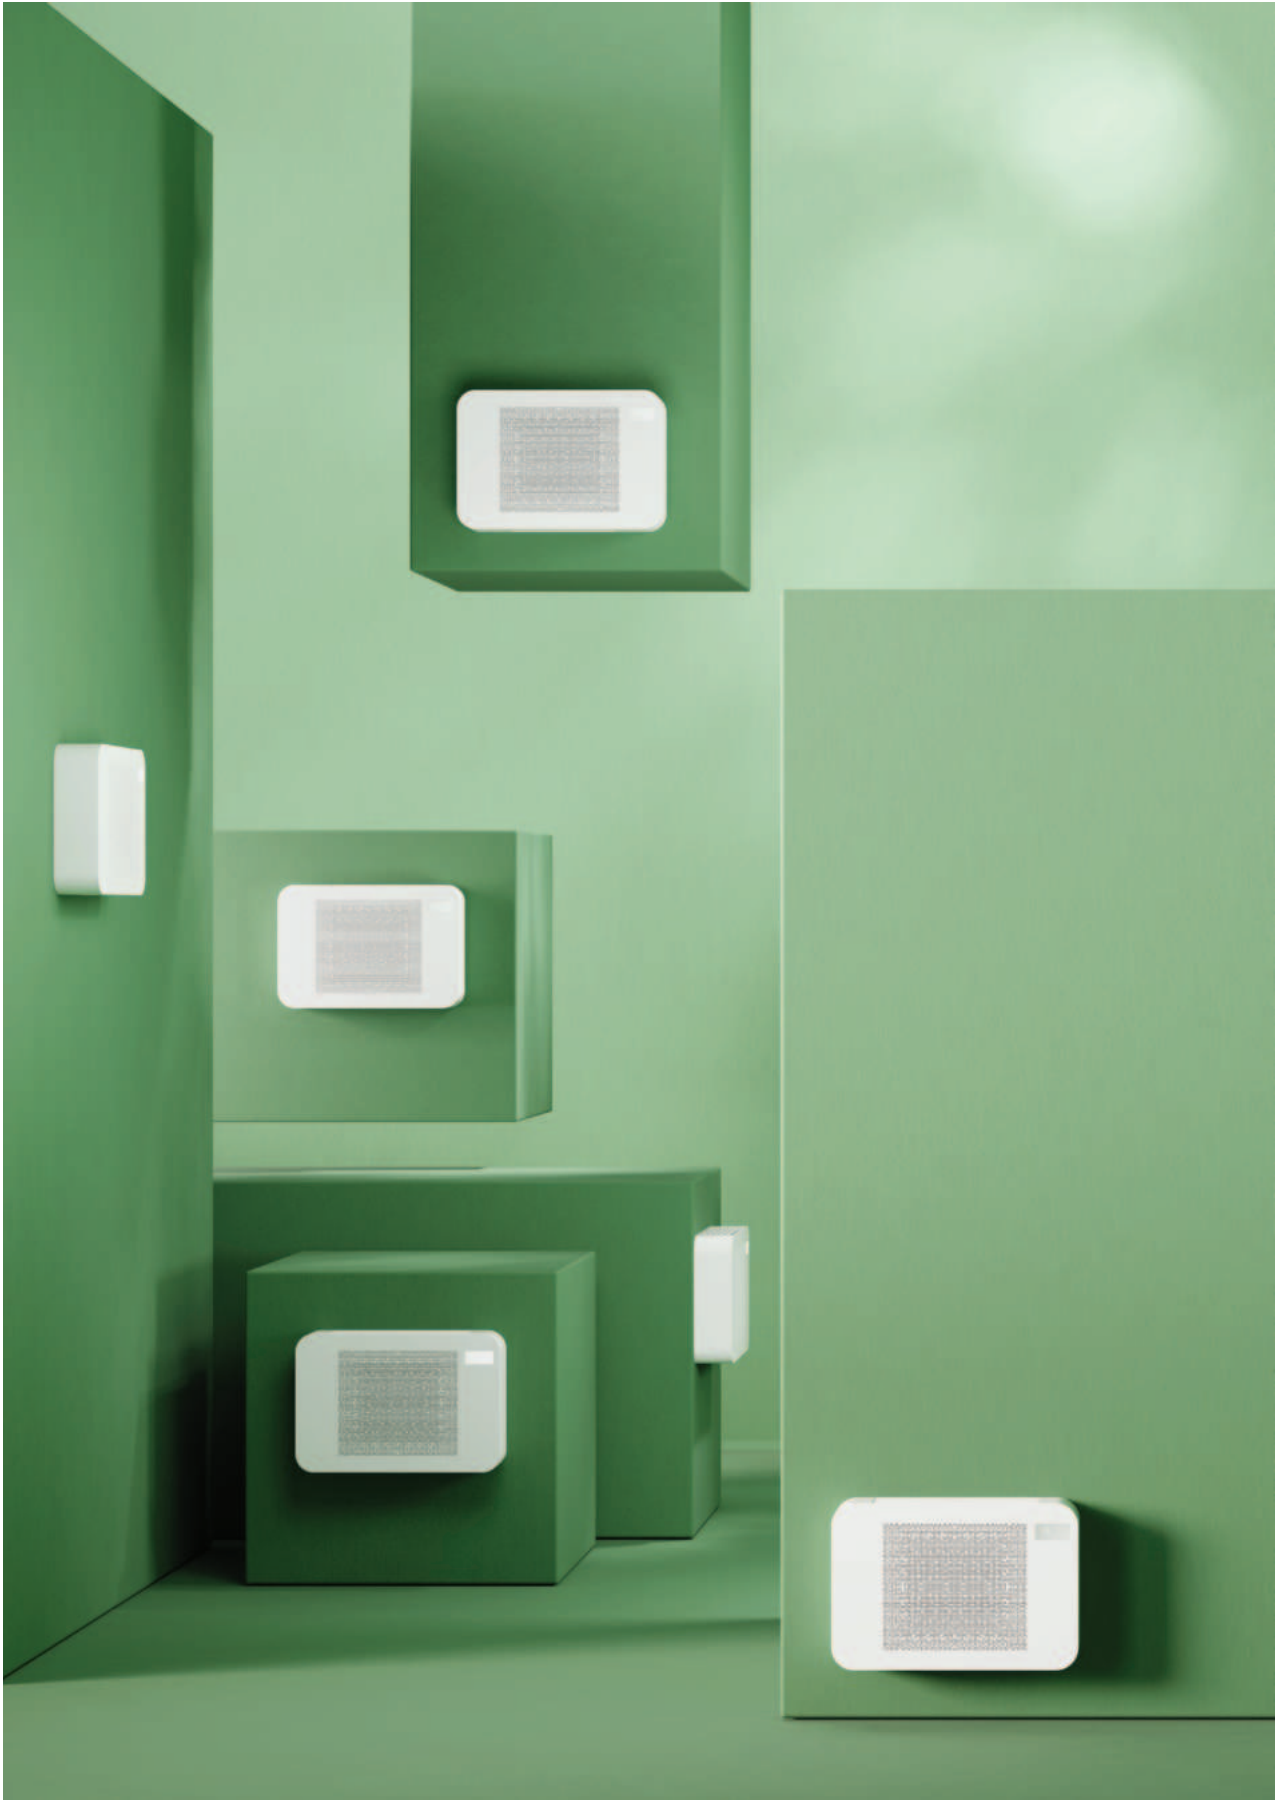

Versatile

FÄRNA combines great power in a small space. Unlike conventional fancoils, which are installed only at the top or bottom, this product offers unique installation versatility: the two models can be placed at the top, at the bottom, in mid-air, to the side, in the middle, this way and that way. Everything is possible with FÄRNA!

Size
-32%

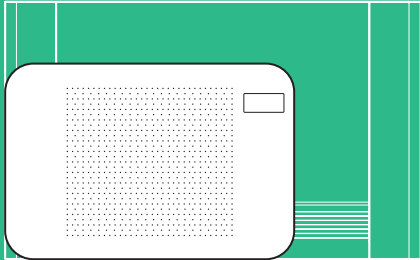

Similar power
BIG e SL 600


Size

Reduce space, significantly, leaving all the power needed for a large environment. Compared with classic AirLeaf models of similar power, FÄRNA reduces the size (width) of the machine by 32% - a third! Not a small unit, but a powerhouse.





Power
+300%

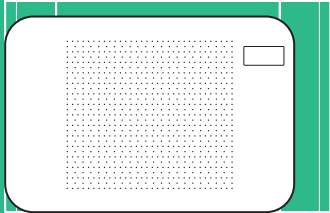


Similar size
BIG e SL 200

Power

Increase the power, significantly, while leaving the size unchanged. Compared with classic AirLeaf models of similar size, FÄRNA increases power by a factor of three.



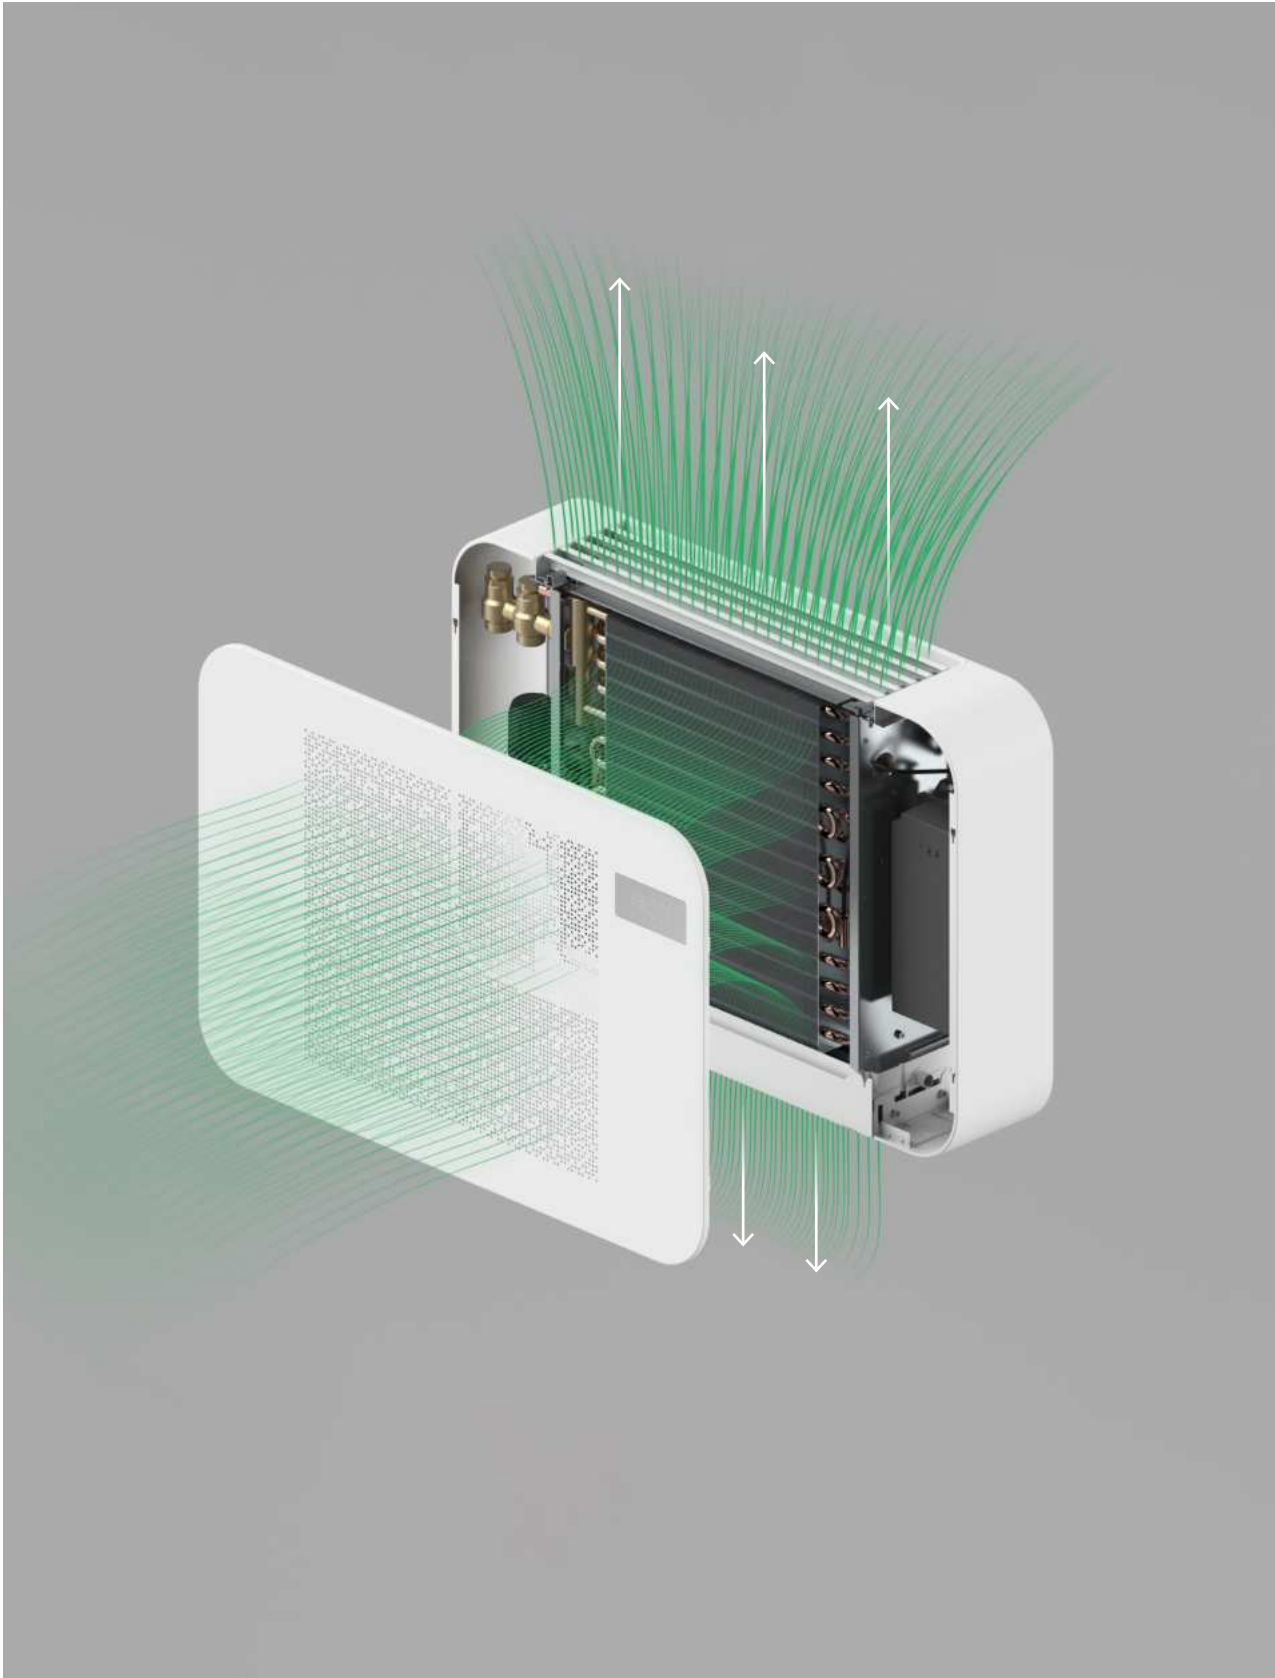







Design

Elegant, different, unconventional... the design is specifically designed for a multifunctional product like FÄRNA. If the size hides the product, the design makes it prominent and valuable.




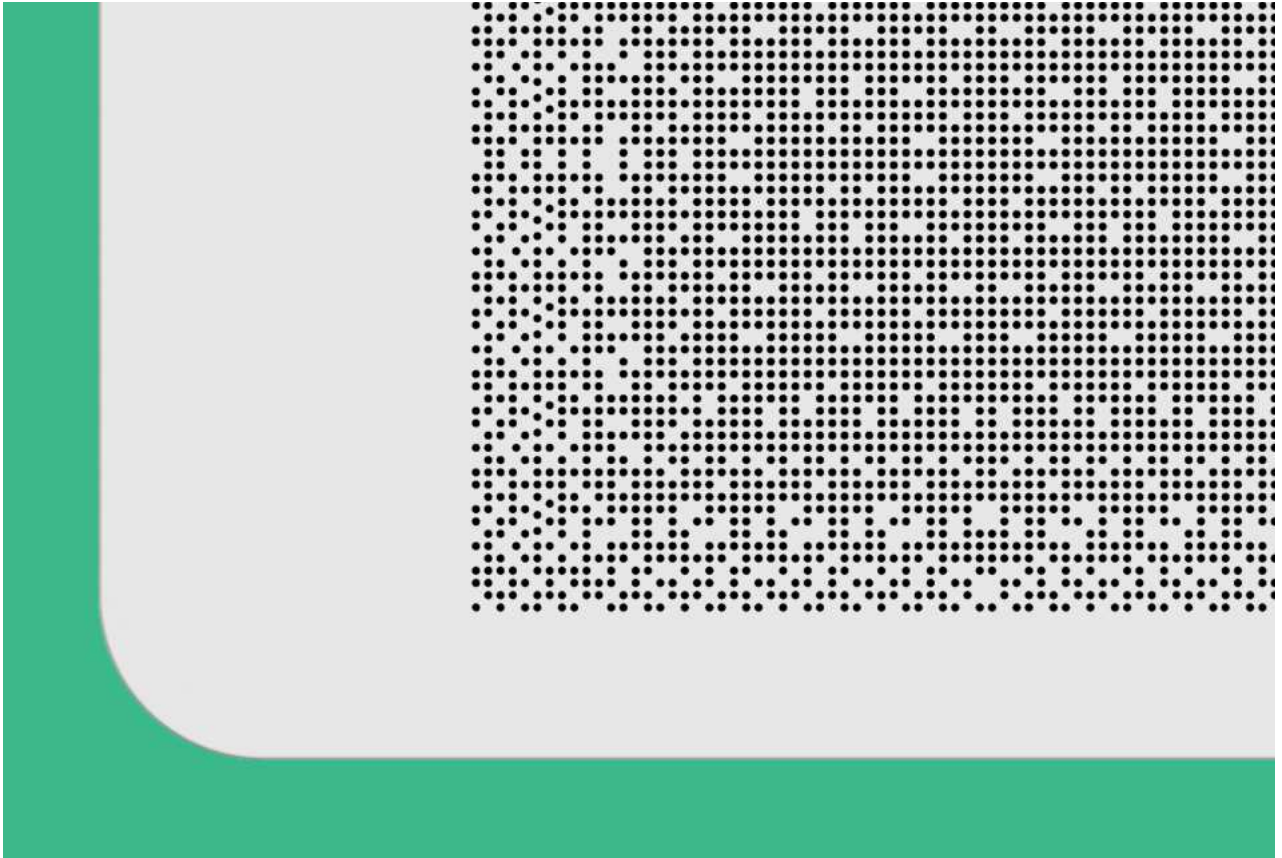

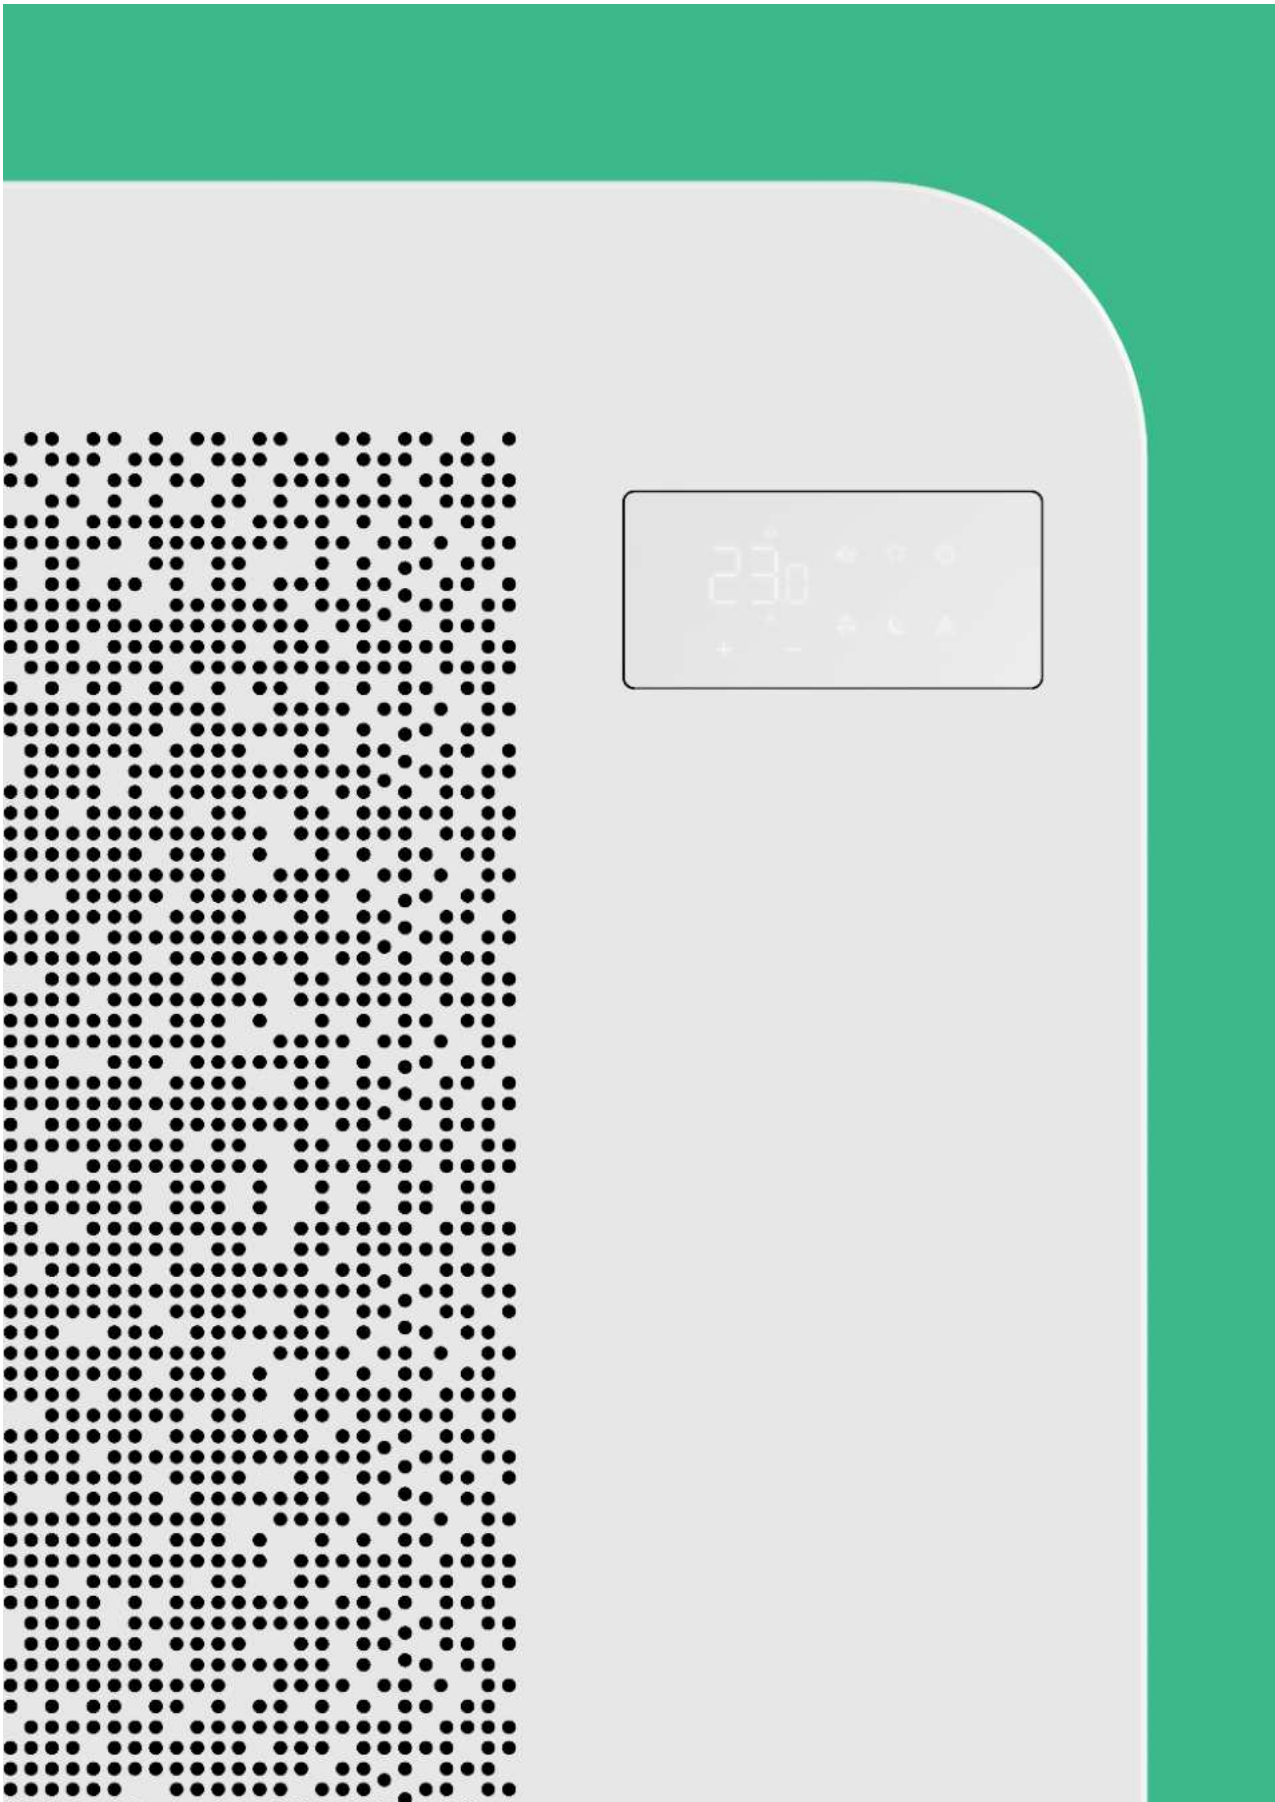




Wall mounted



On board



From remote control


M7 series

Commands

With M7, INNOVA skillfully combines design and technology for a new series of controls, M7, surely at the top of its class. The novelty is already in the user panel, now with increased sensitivity touch technology and automatic brightness. Functionality has been integrated, for example with Bluetooth version-and in the wall-mounted version the panel has practically halved thickness and perfect installability on 503 electrical box, the most common on the market.

A concentrate of technology, a clear example of beauty and practicality.

New rounded design




New on-board and wall-mounted controls, M7 Series




Power in minimum size




Two sizes, SMALL and BIG




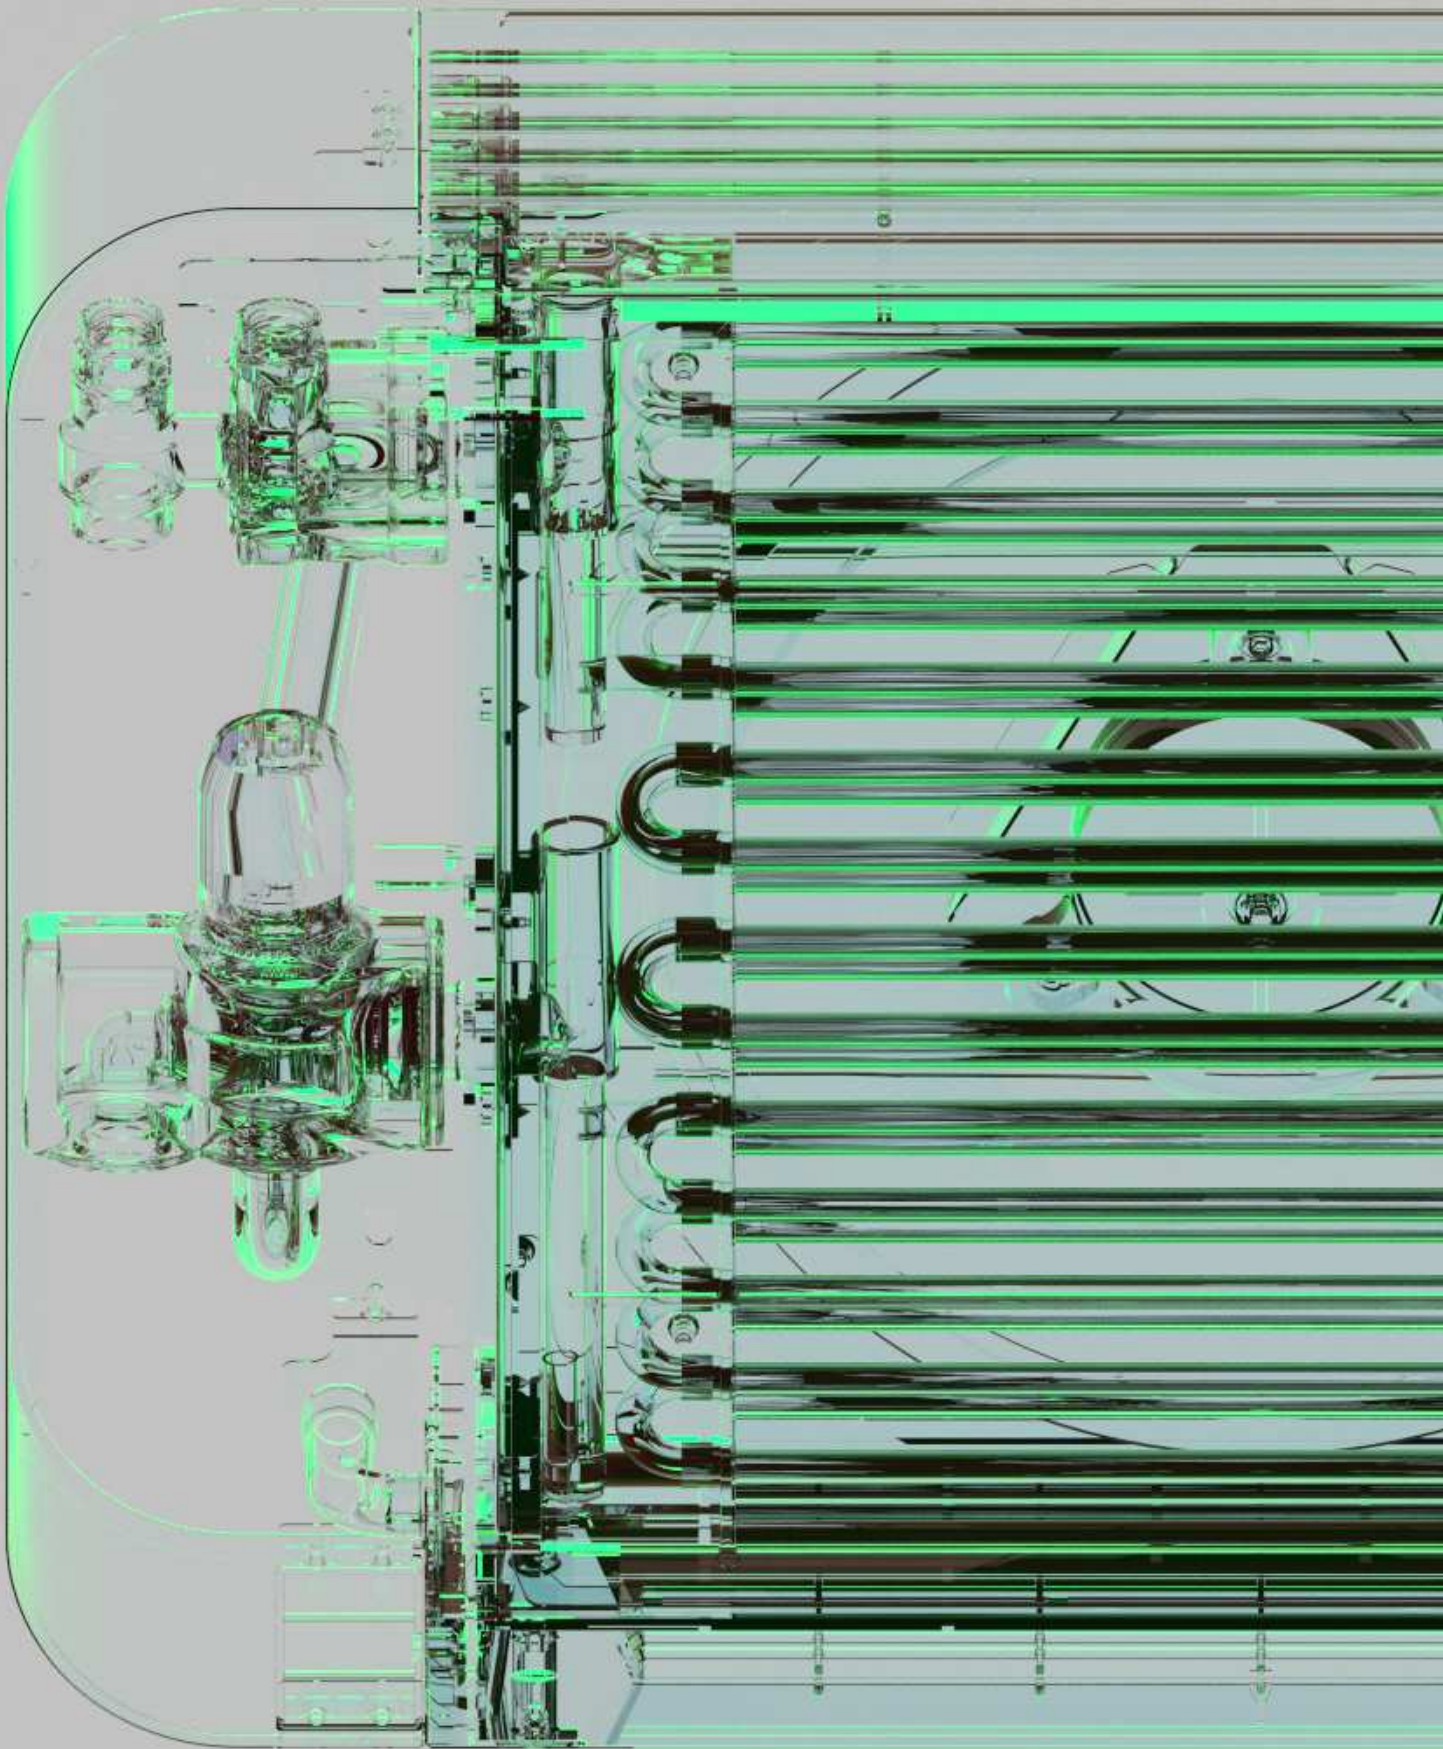


SIMILAR SIZE POWER TRIPLED

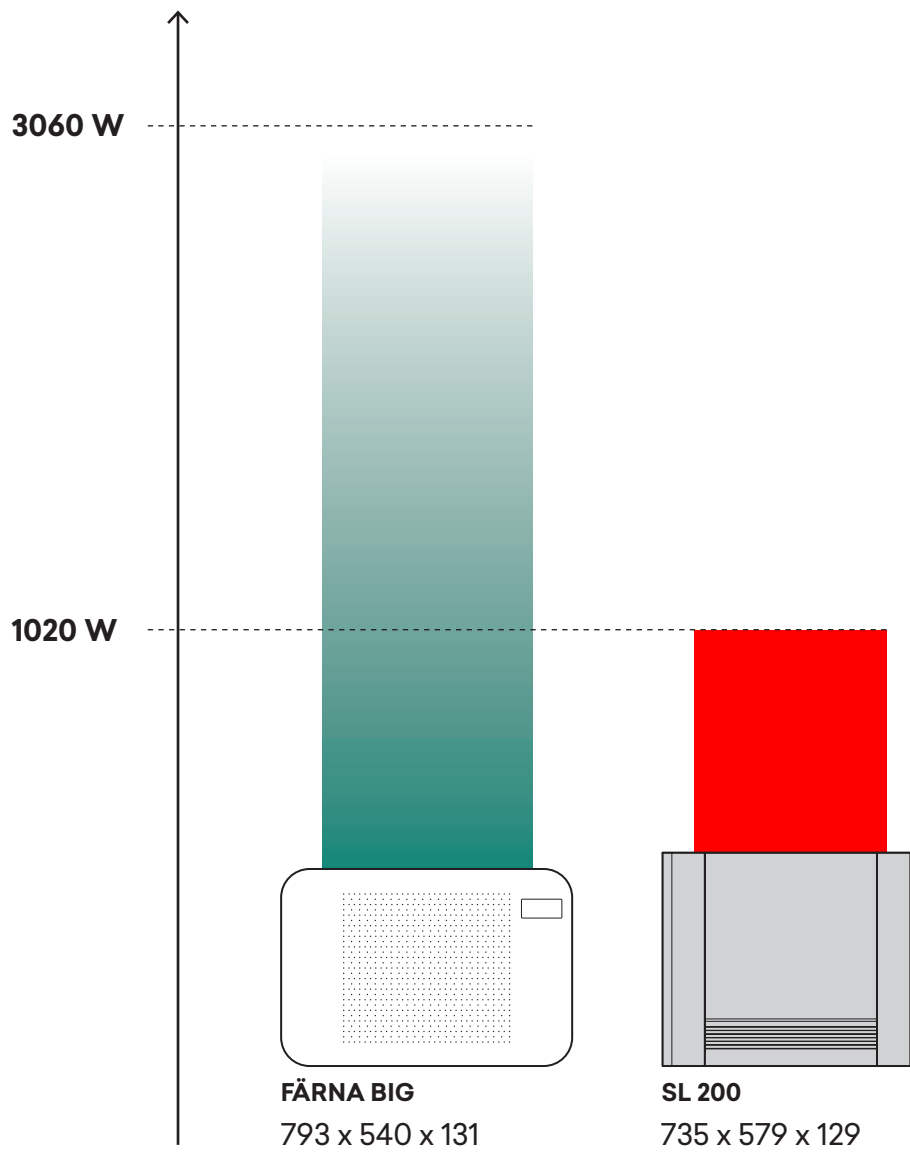



SIMILAR POWER SIZE NEARLY HALVED

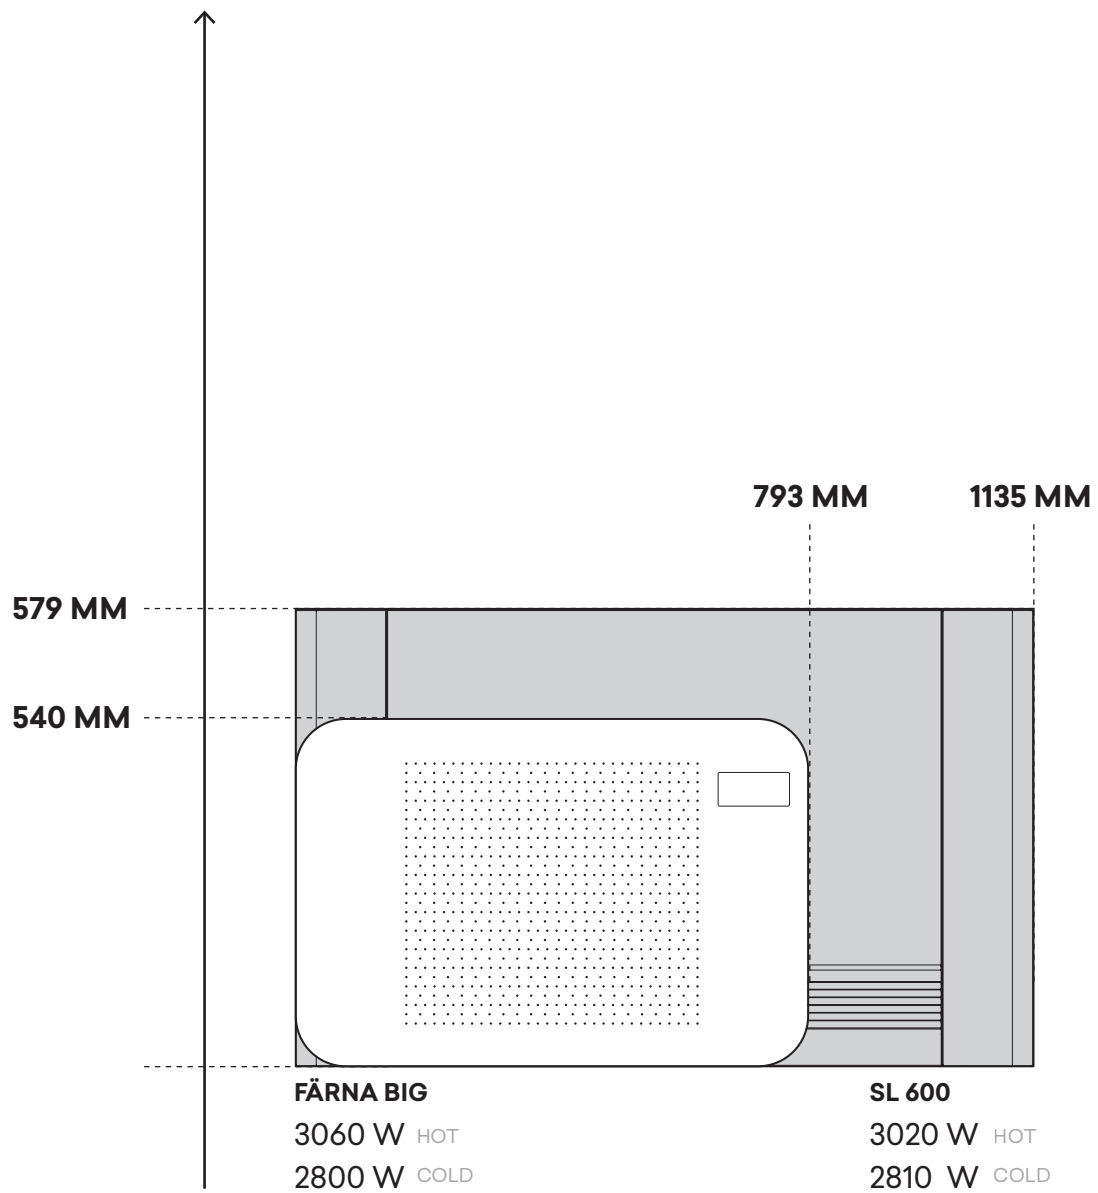



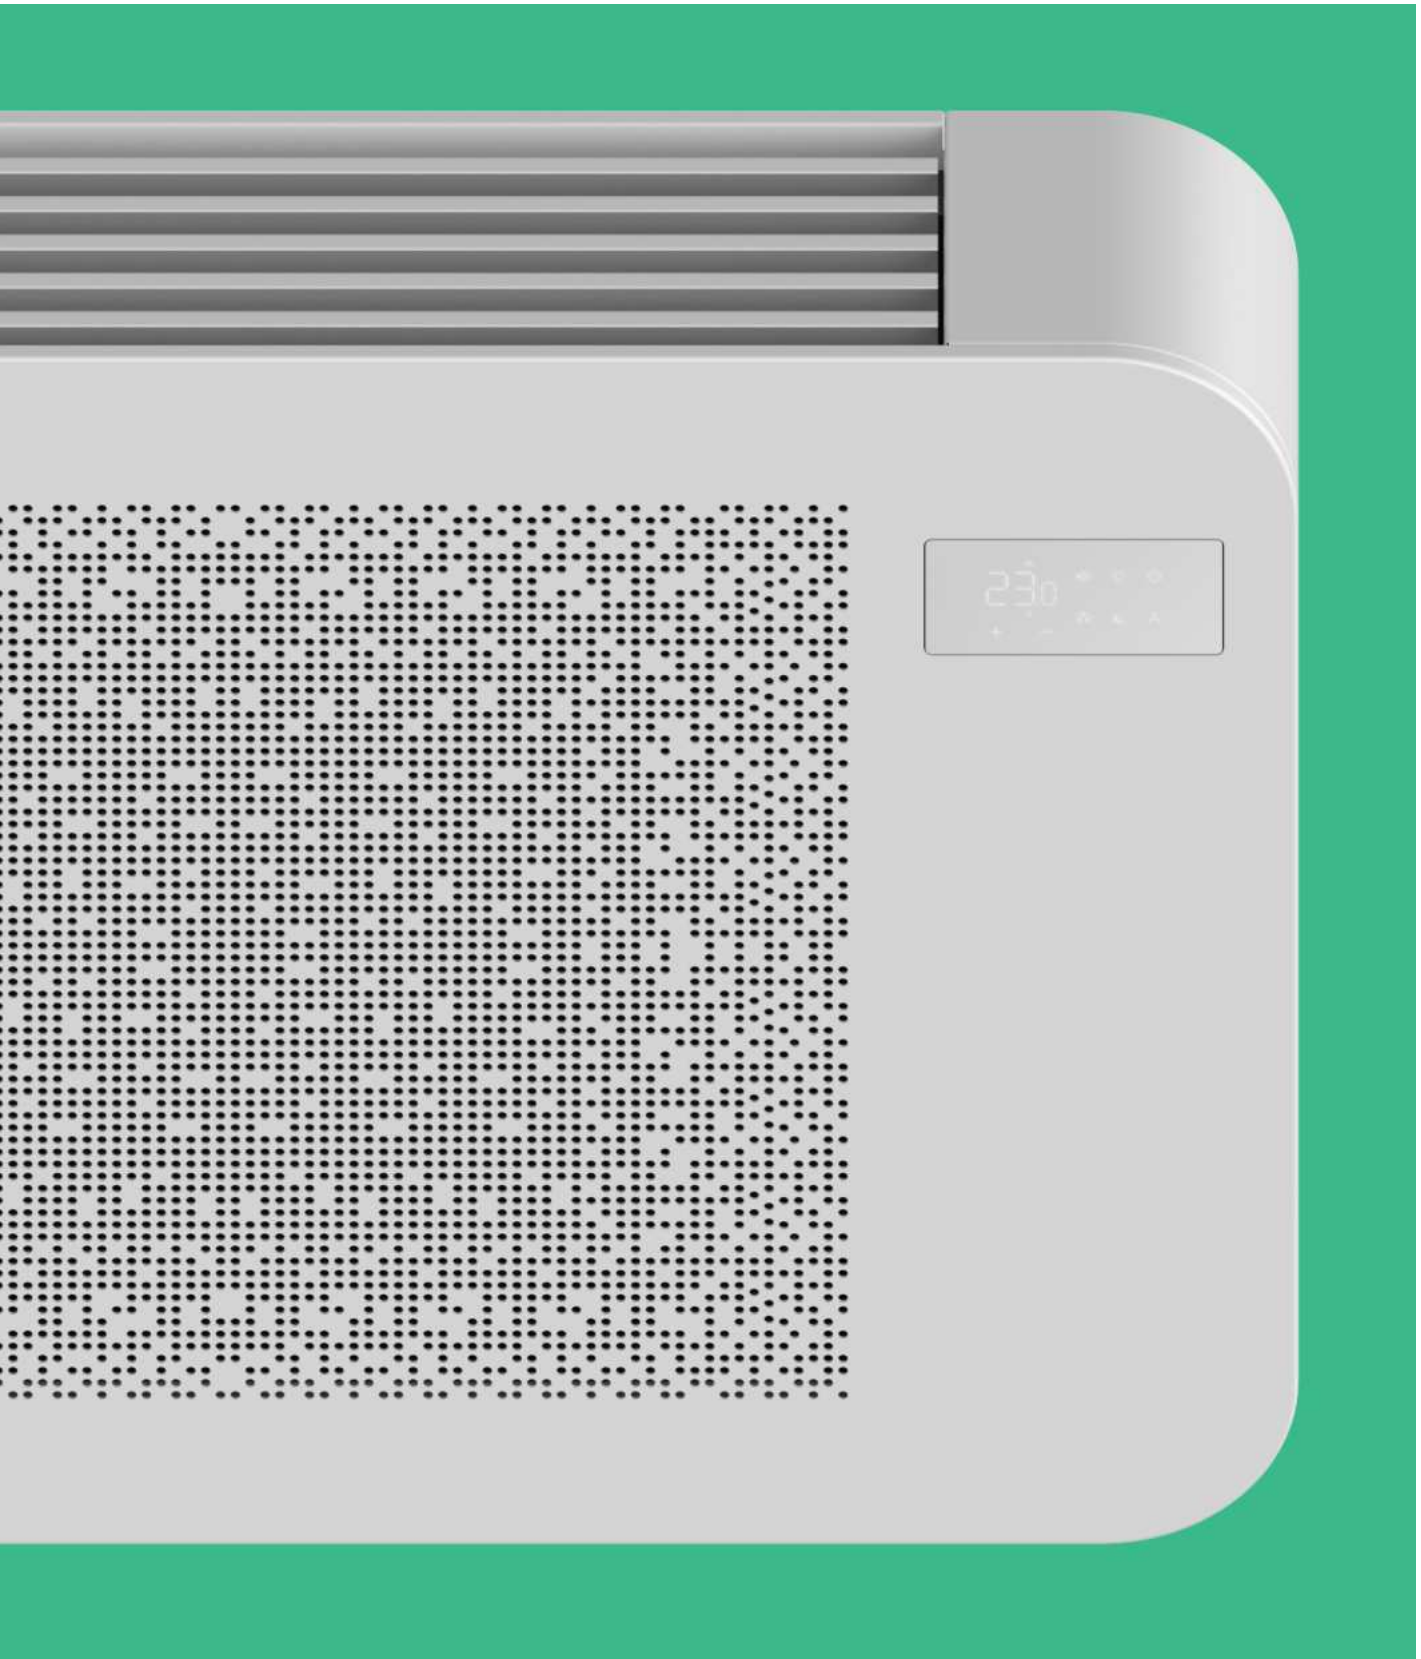


FÄRNA

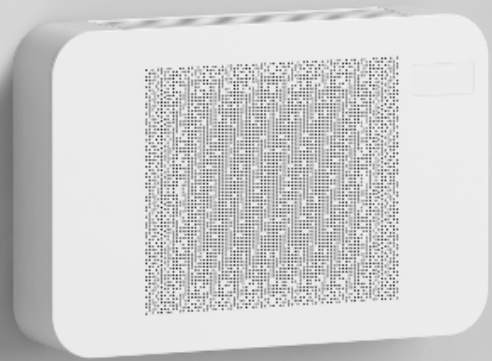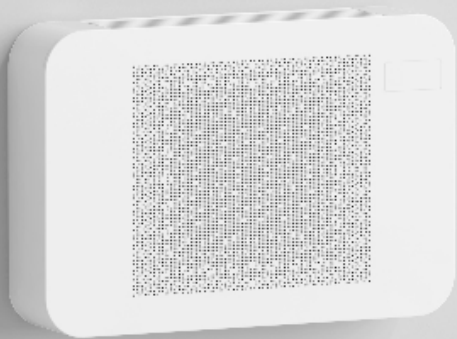

FÄRNA SMALL

○ White RAL 9003


② 2-Pipe Version

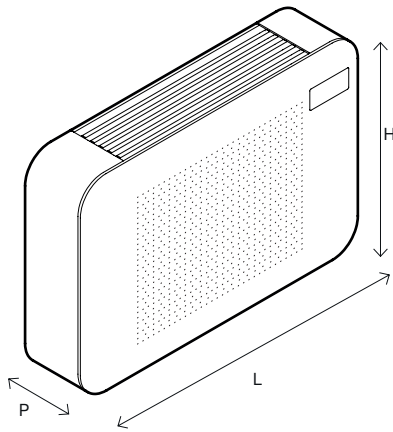

FÄRNA BIG


○ White RAL 9003

② 2-Pipe Version

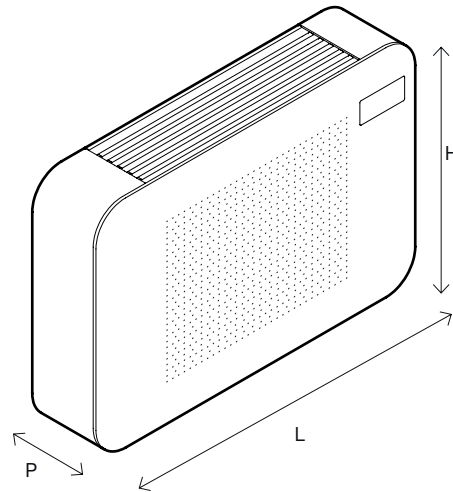

MODEL	SMALL	BIG
L (mm)	650	793
P (mm)	131	131
H (mm)	440	540

On-board controls

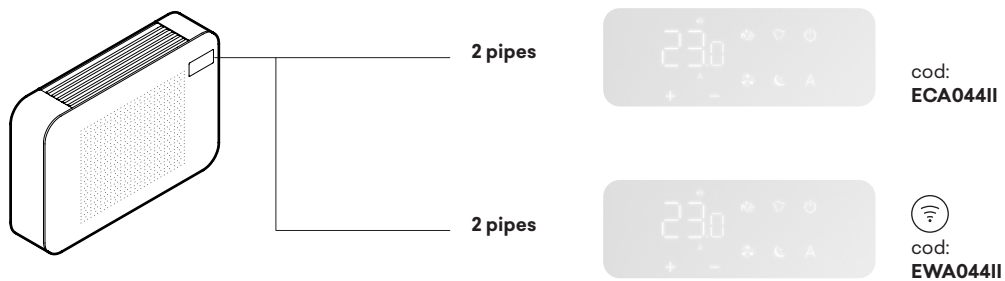

On-board control - M7 SERIES



2 pipes
Cod:
ECA044II

- PI Logic
- Touch interface
- Modulating speed
- RS485 modbus port for BUTLER or BMS connection
- Remote control provided as standard




2 pipes
Cod:
EWA044II

- PI Logic
- Touch interface
- Modulating speed
- WiFi connection
- Remote control provided as standard





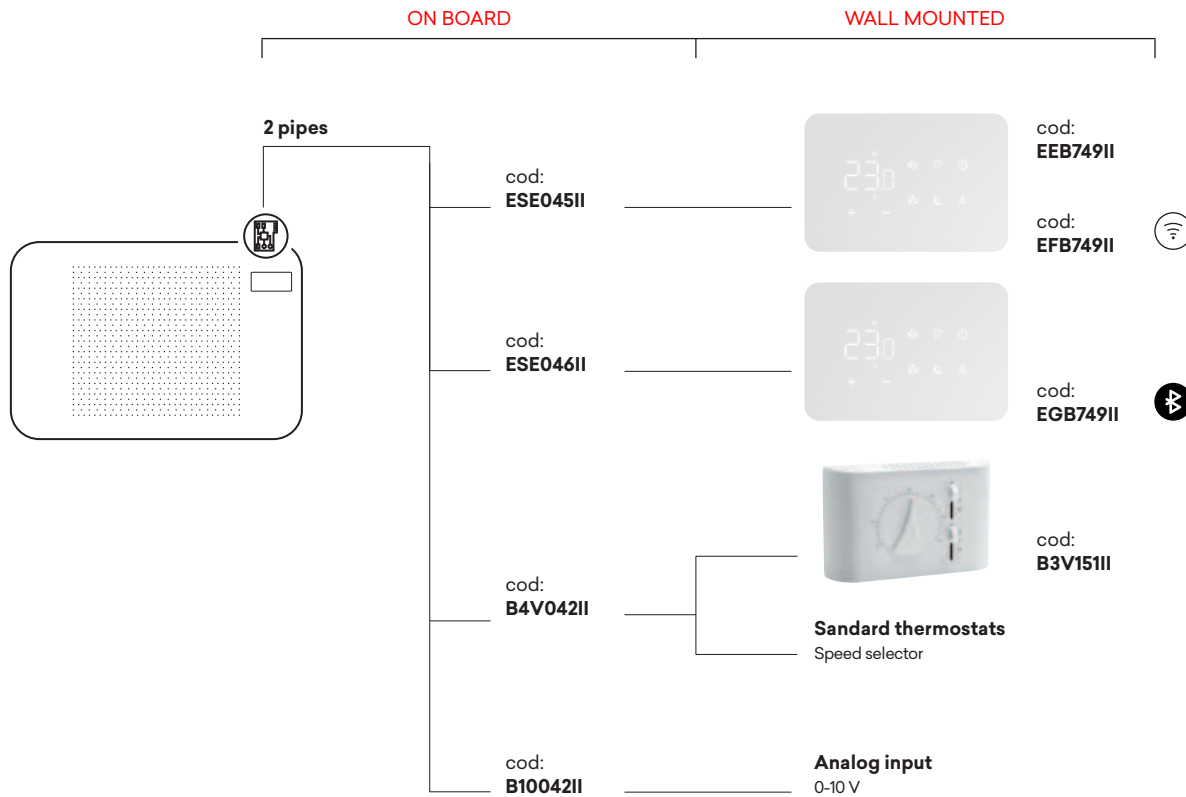






Wall-mounted remote controls




On board


wall-mounted

 <p>2 pipes Cod: ESE045II</p>	 <p>Cod: EEB749II</p>	<ul style="list-style-type: none"> • PI Logic • Touch interface • Modulating speed • Control up to 16 units • <u>RS485 modbus port for BUTLER or BMS connection</u>
 <p>2 pipes Cod: ESE046II</p>	 <p>Cod: EFB749II</p>	<ul style="list-style-type: none"> • PI Logic • Touch interface • Modulating speed • Control up to 16 units • <u>WiFi connection</u>
 <p>2 pipes Cod: ESE046II</p>	 <p>Cod: EGB749II</p>	<ul style="list-style-type: none"> • PI Logic • Touch interface • Control up to 16 units • <u>Bluetooth</u>
 <p>2 pipes Cod: B4V042II</p>	 <p>Cod: B3V151II</p>	<ul style="list-style-type: none"> • Electromechanical • Wall installation • 3 speed • Seasonal selector
 <p>2 pipes Cod: B10042II</p>	<p>0-10 V</p>	<ul style="list-style-type: none"> • Analog input 0-10 V (without temperature probe)


Hydraulic assemblies and fittings




I20205II ALL Manual 2-way valve assembly (*)



V20139II ALL 2-way valve assembly (inlet valve and lockshield) with thermoelectric motor (*)



V30721II SMALL 3-way diverter valve assembly with thermoelectric motor



V30722II BIG 3-way diverter valve assembly with thermoelectric motor

(*) Factory installed and tested accessory

Left-handed hydraulic connections ONLY, not reversible



Technical data sheets

2-PIPES VESION

MODEL		SMALL	BIG
Cooling performances (W 7/12 °C; A 27 °C) (1)			
Total cooling capacity	kW	1,50	2,80
Sensible cooling capacity	kW	1,26	2,32
Water flow	L/h	253,0	473,0
Pressure drop	kPa	9,0	17,0
Maximum power consumption	W	15	25
Maximum sound power (2)	dB(A)	53	51
Heating performances (W 45/40 °C; A 20 °C) (3)			
Heating capacity	kW	1,80	3,06
Water capacity	L/h	304,0	510,0
Pressure drop	kPa	10,0	16,0
Maximum power consumption	W	15	25
Maximum sound power (2)	dB(A)	53	51
Hydraulic data			
Maximum operating pressure	bar	10	10
Hydraulic connections	" EK		3/4
Electrical data			
Power supply	V/ph/Hz	230/1/50	230/1/50
Maximum absorbed current	A	0,06	0,10
Power consumption at the minimum speed	W	3,1	3,6
Sound data			
Sound pressure level at maximum air flow	dB(A)	42	41
Sound pressure level at medium air flow	dB(A)	34	33
Sound pressure level at minimum air flow	dB(A)	25	24
Product dimensions and weight			
Total width	mm	650	793
Total height	mm	440	540
Total depth	mm	131	131
Net weight	kg	13,1	17,3

1 | Water temperature at coil inlet 7 °C, Water temperature at coil outlet 12 °C, Ambient air temperature 27 °C b.s. and 19 °C b.u. (according to EN 1397)

2 | Sound power measured according to EN 16583

3 | Water temperature at coil inlet 45 °C, Water temperature at coil outlet 40 °C, Ambient air temperature 20 °C b.s. and 15 °C b.u. (according to EN 1397) - maximum speed






BUTLER^{PRO}



BUTLER^{PRO} TOUCH
with built-in display



Display



BUTLER^{PRO}
by WEB

Local PC

Tablet e Mobile




The advanced plant control

The BUTLER^{PRO} web server is the system that INNOVA has developed to control an entire winter and summer air conditioning system from a local and remote network.

BUTLER^{PRO} allows you to connect the heat pump, controlled mechanical ventilation system, fan coils and all the other system elements via a serial connection.

BUTLER^{PRO} is complete, simple and intuitive at the same time: you can configure a weekly calendar with time zones, create specific zones and change the settings so your home is at the right comfort level for your needs.



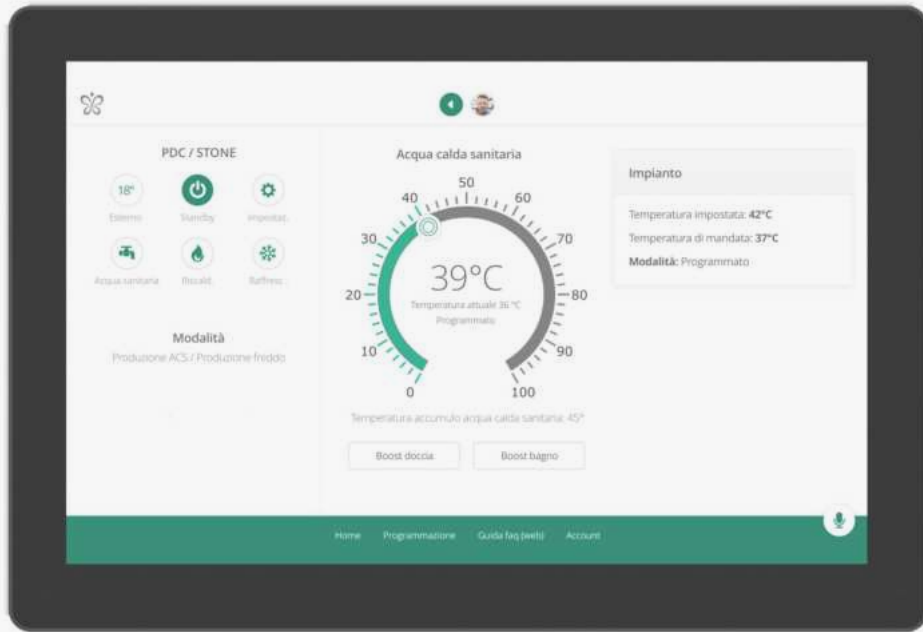

Supervision and control through local network or remotely

The system can be managed through a smartphone, tablet or computer

Summer and winter personalised programming

Different programmes can be set for each season

Setting of three temperature levels on the INNOVA fan coil network

For each room or zone it is possible to select 3 different work temperatures, which can be modified at any time

Weekly time programming

In each room it is possible to set different operating times

Etwork interface like the one on PCs

Once the bus network between the heat pump and the fan coils has been made, the connection with the Web server is the same as that of a normal computer


Remote assistance

With the user's consent, BUTLER can automatically access the INNOVA cloud for diagnostics and assistance in case of need


Control by room

Room-by-room control with BUTLER you can set a weekly time-based calendar, create scenarios for each room or by zones, change settings so that your home is at the right comfort level at the time you need it



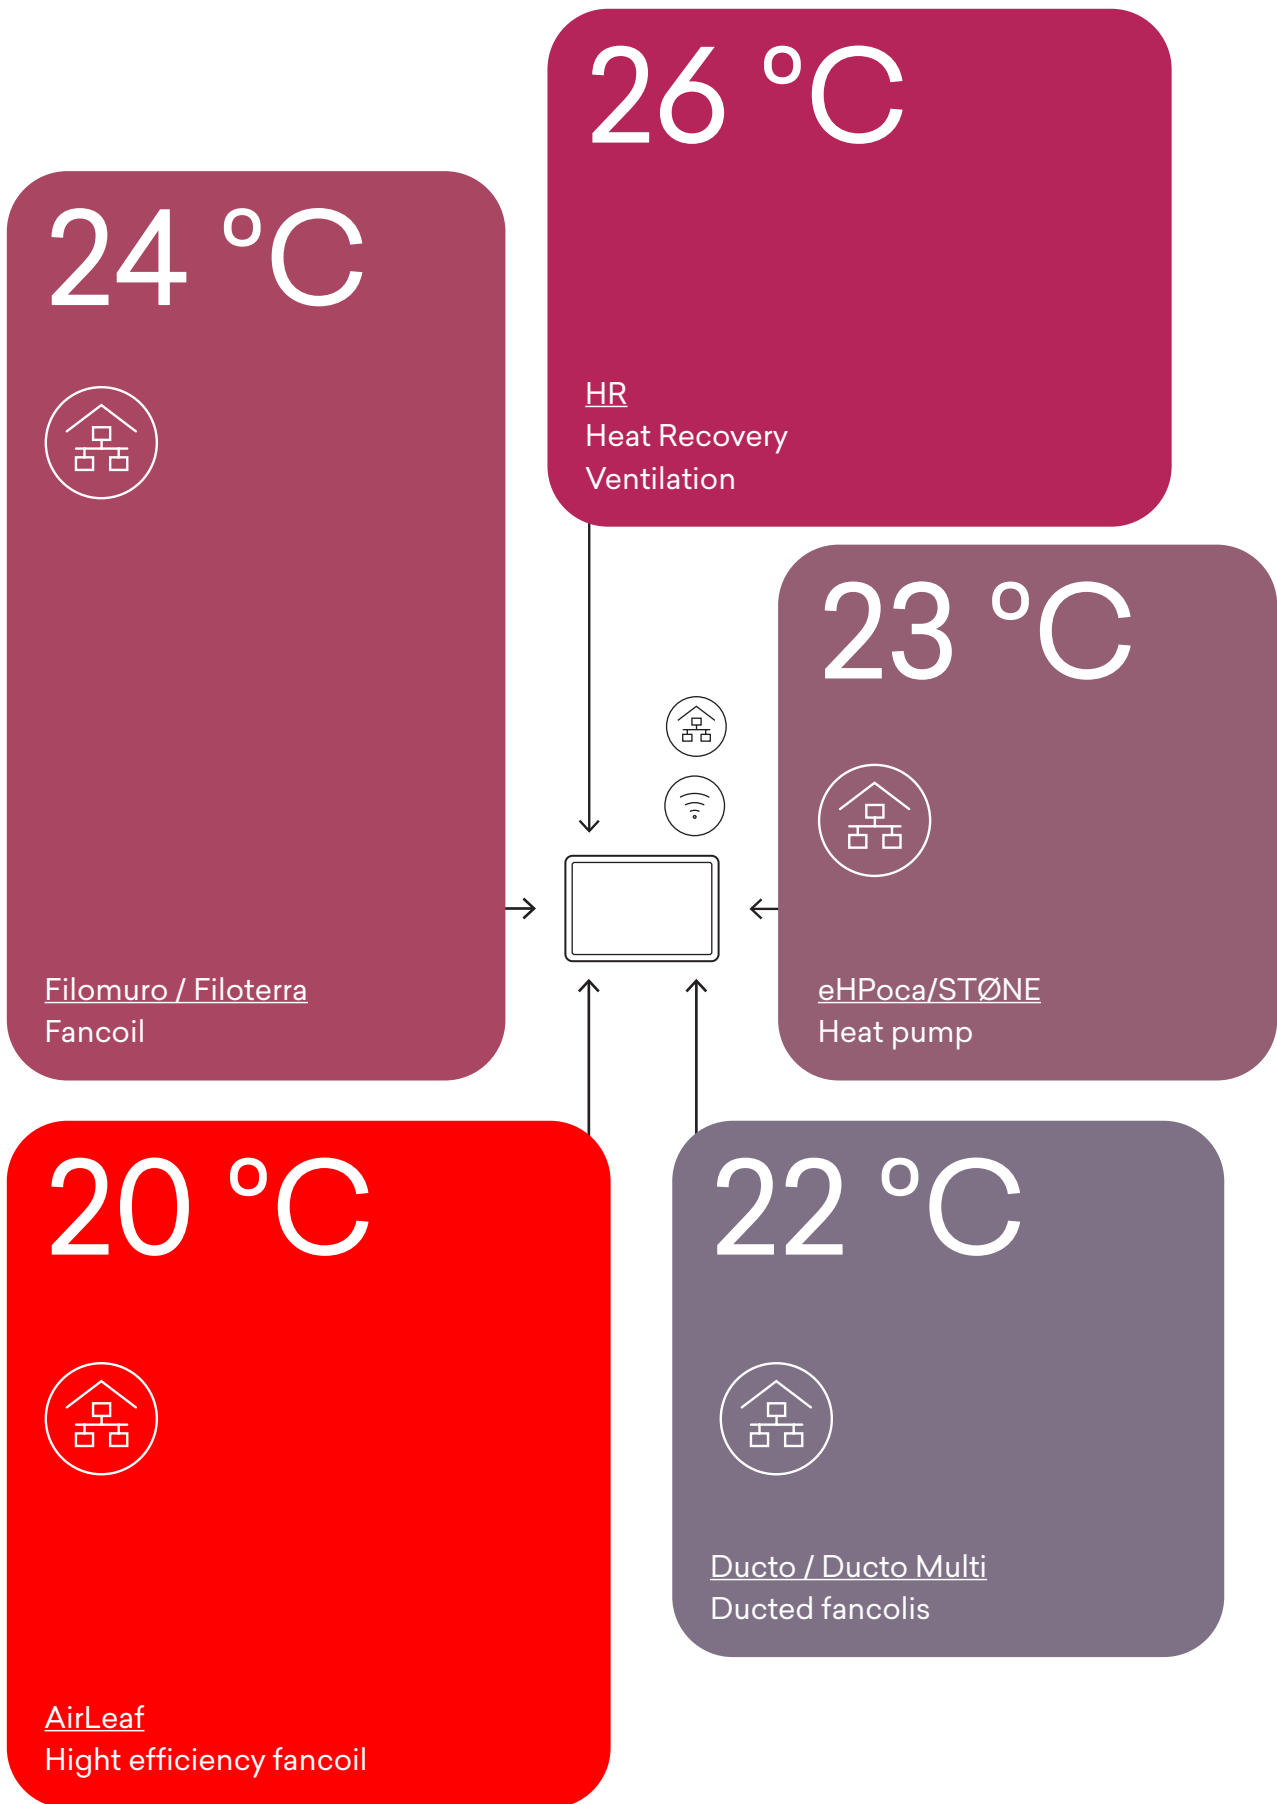


Web Server
BUTLER PRO

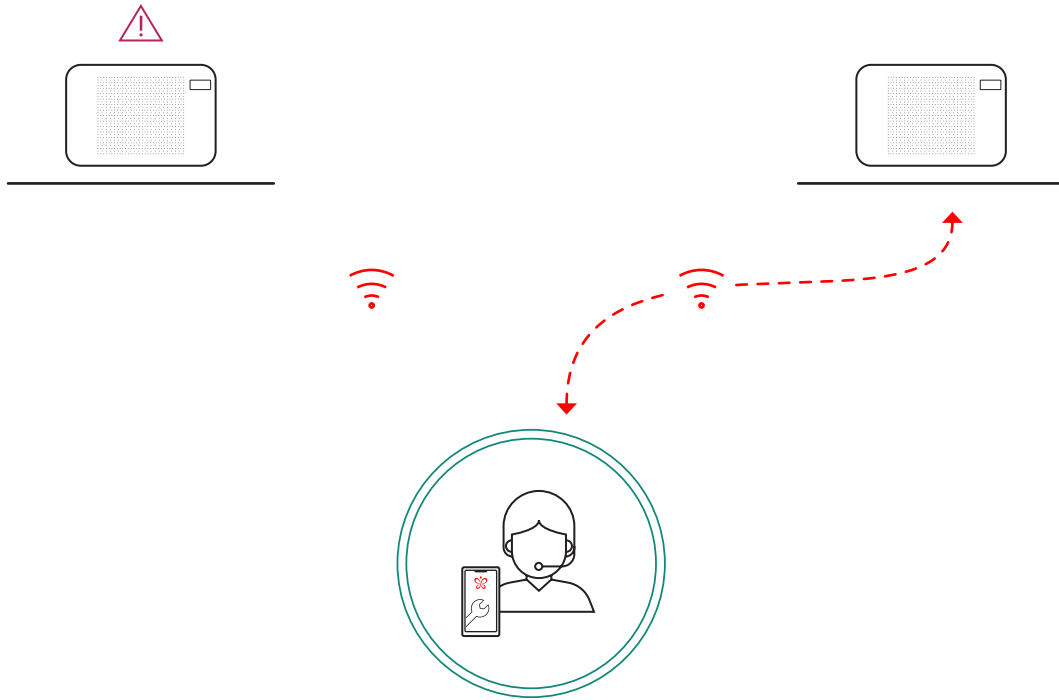

Remote assistance

With the user's consent, BUTLER PRO can automatically access the INNOVA cloud for diagnostics and assistance in case of need. Thanks to the Internet connection, it is possible to verify remotely the correct operation of INNOVA products connected to the BUTLER PRO. Any operating anomalies can be transmitted automatically from the BUTLER PRO to the assistance centre which can intervene by modifying the functional parameters or decide to physically intervene by providing a quick and timely service.



Total control

The advantage of choosing a complete INNOVA system is that, for any need, we are the only reference both for routine maintenance and for assistance purposes. A complete and high quality service.





Network commands



For remote control and fancoils network management.


Web Server BUTLER.

Fancoils with controls
cod:
ECA044II - EEB749II

BUTLER^{PRO}

Kit Web Server BUTLER^{PRO}
for local and remote control of
fancoil networks.



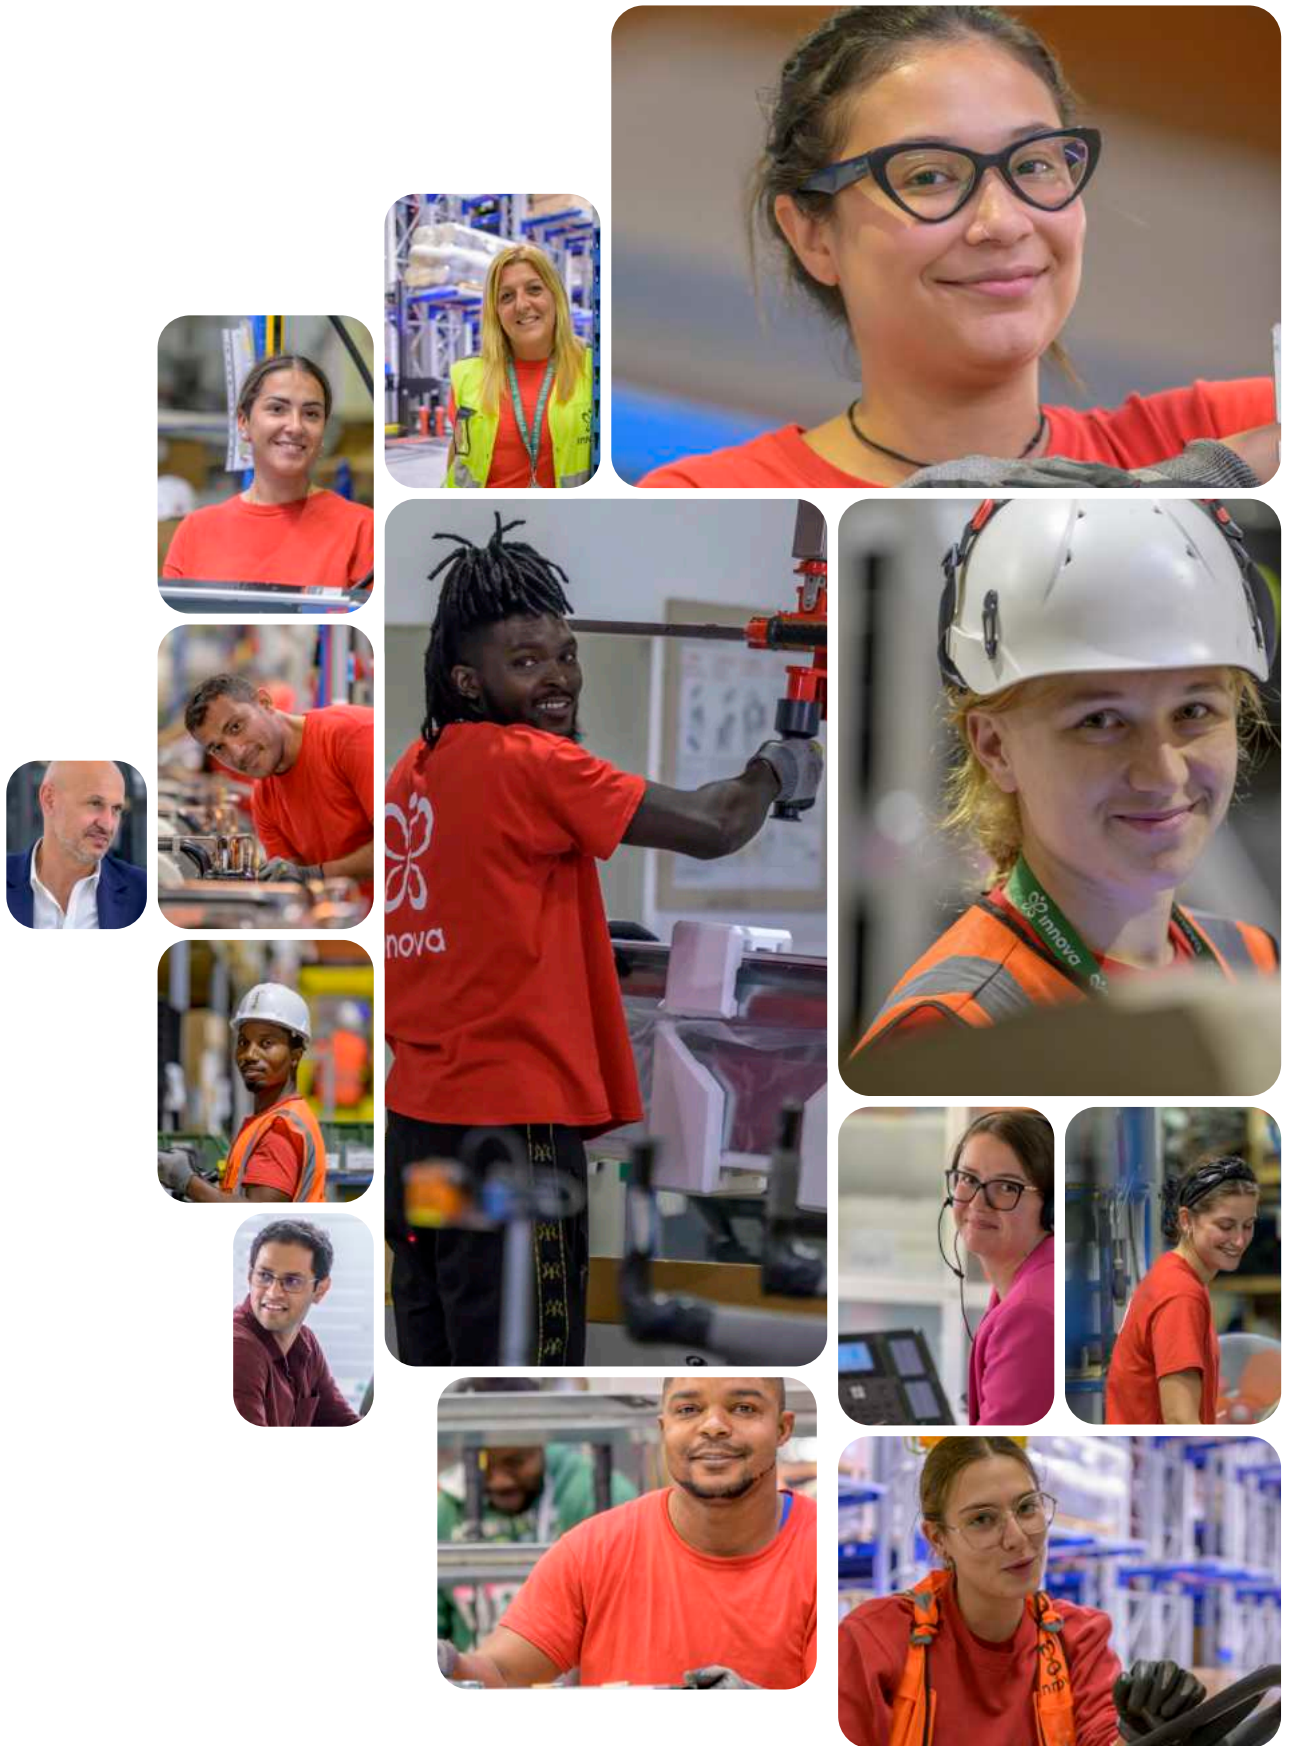



Idee, prodotti, persone.



CREDITS

Product Designer

Luca Papini

Art Direction & Graphic

Osmo design

Photography

Ottavio Tomasini


Special thanks to:

Akira Nishikawa

All rights reserved - photographs, images and texts are protected by copyright, any use of all or part of them not expressly authorised by INNOVA will result in consequent sanctions.

INNOVA reserves the right to make changes at any time to its products, accessories and technical data in order to improve its offer.



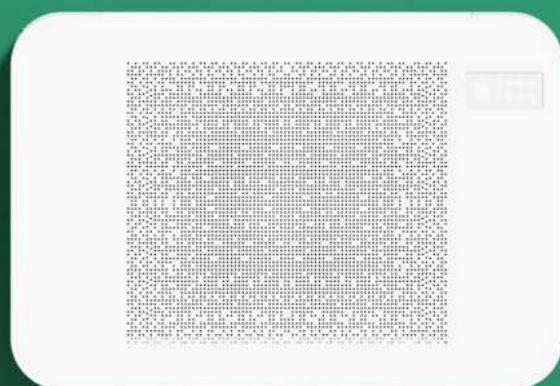

INNOVA s.r.l.
Via 1° Maggio, 8
38089 Storo (Tn)
Tel. +39 0465 670104
Fax: +39 0465 674965
info@innovaenergie.com

www.innovaenergie.com

Edizione 2024/1