



Elektroniczne sterowanie Smart Touch dla klimakonwektorów AirLeaf

Sterowanie na urządzeniu.
Zalecany do instalacji pionowych.

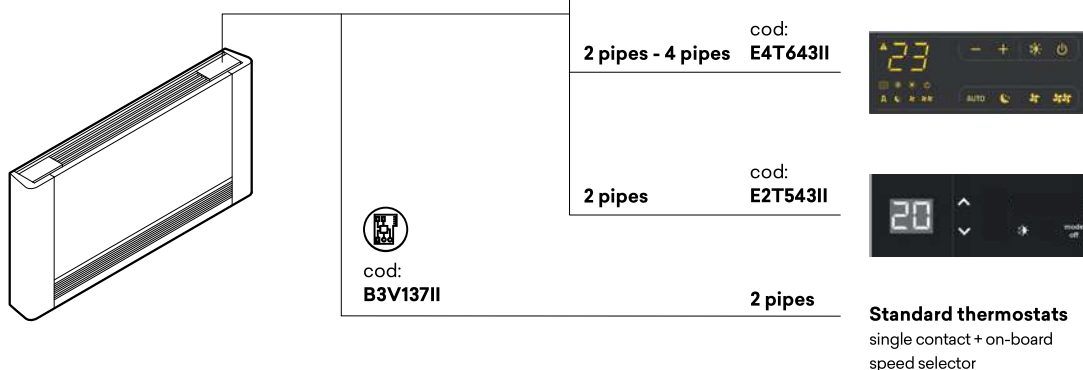

Sterowanie do montażu na ścianie.
Zalecane do instalacji wbudowanych i sufitów podwieszanych.

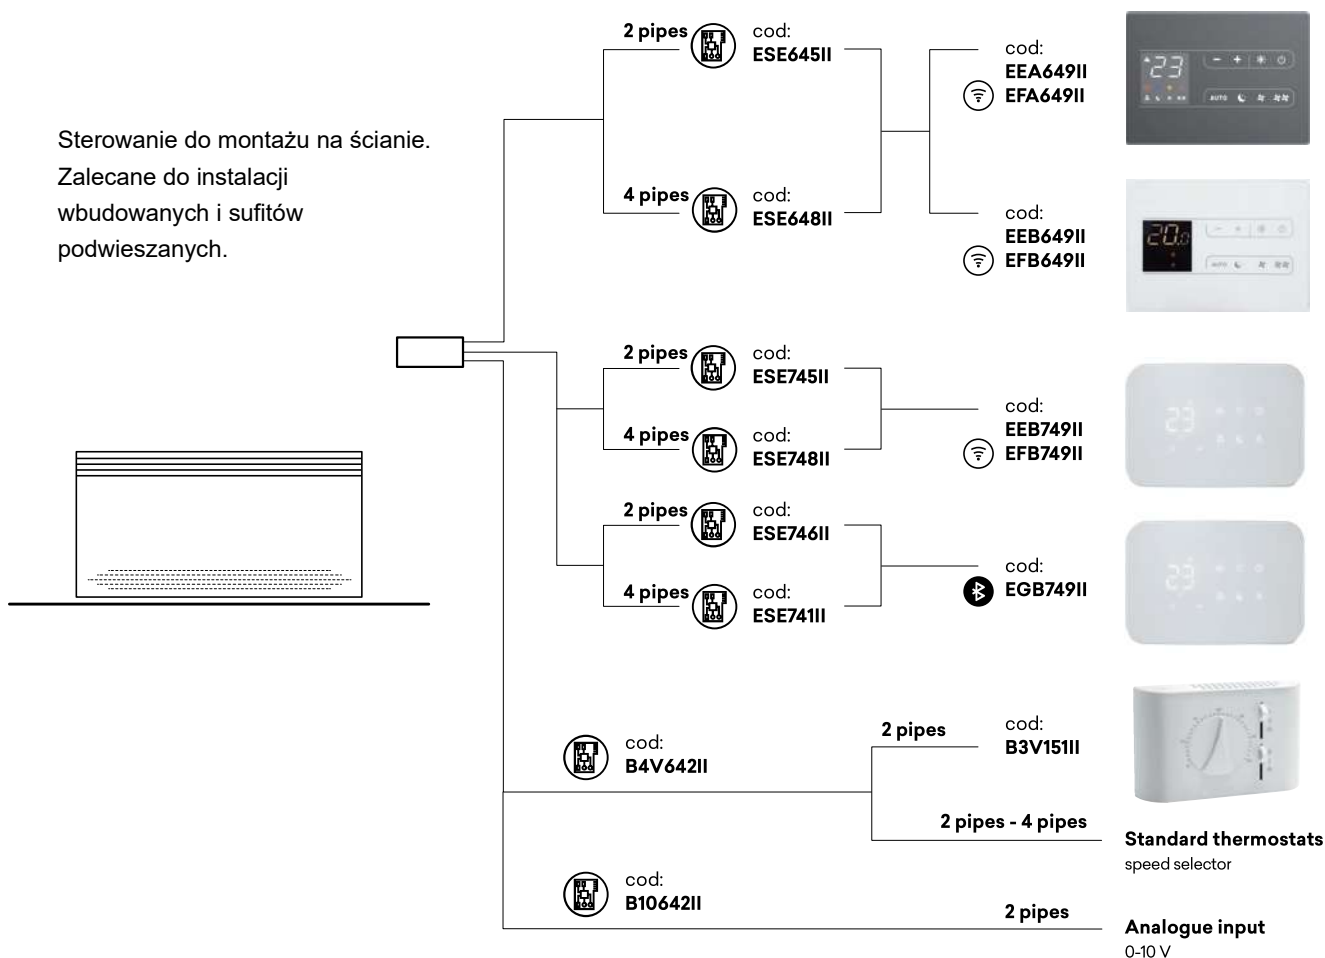

NEW

M7 series controls.

Modulating speed.

BOARD:



2 pipes cod: **ESE745II**
4 pipes cod: **ESE748II**



2 pipes cod: **ESE746II**
4 pipes cod: **ESE741II**

INTERFACE:

- PI Logic
- Touch interface
- Modulating speed
- Controls up to 16 units
- RS485 modbus port for BUTLER or BMS connection

- PI Logic
- Touch interface
- Controls up to 16 units
- Bluetooth



2 and 4 pipes
 cod: **EEB749II**



cod: **EFB749II**



2 and 4 pipes
 cod: **EEG749II**



On-board controls.

Recommended for vertical visible installations.

INTERFACE:



- PI Logic
- Smart Touch interface
- Modulating speed

2 pipes
 cod: **ECA644II**

4 pipes
 cod: **ECA647II**



cod: **EWF644II**

cod: **EWF647II**



- Smart Touch interface
- 4 fixed speeds

2 pipes
 cod: **E4T643II**

4 pipes
 cod: **E4T643II**



- Interface with 4 fixed speeds

2 pipes
 cod: **E2T543II**



Standard single-contact thermostats + on-board speed selector (without temperature probe)

cod: **B3V137II**

Wall mounting controls.

Modulating speed.

BOARD:



2 pipes cod: **ESE645II**
4 pipes cod: **ESE648II**

INTERFACE:

- PI Logic
- Touch interface
- Modulating speed
- Controls up to 30 units
- RS485 modbus port for BUTLER or BMS connection



2 and 4 pipes:
 cod: **EEA649II**

cod: **EEB649II**



cod: **EFA649II**

cod: **EFB649II**

Universal interface boards.



2 and 4 pipes
 cod: **B4V642II**



2 pipes
 cod: **B10642II**

Analogue input 0 - 10 V (without temperature probe)

Termostati abbinabili a B4V642II.

- Electromechanical
- Wall installation
- 3 speeds
- seasonal selector

Standard thermostats with speed selector



2 pipes
 cod: **B3V151II**

2 pipes
4 pipes